


NEW PRODUCT!

HEC Condensers

Maximum Working Pressure—400 psig

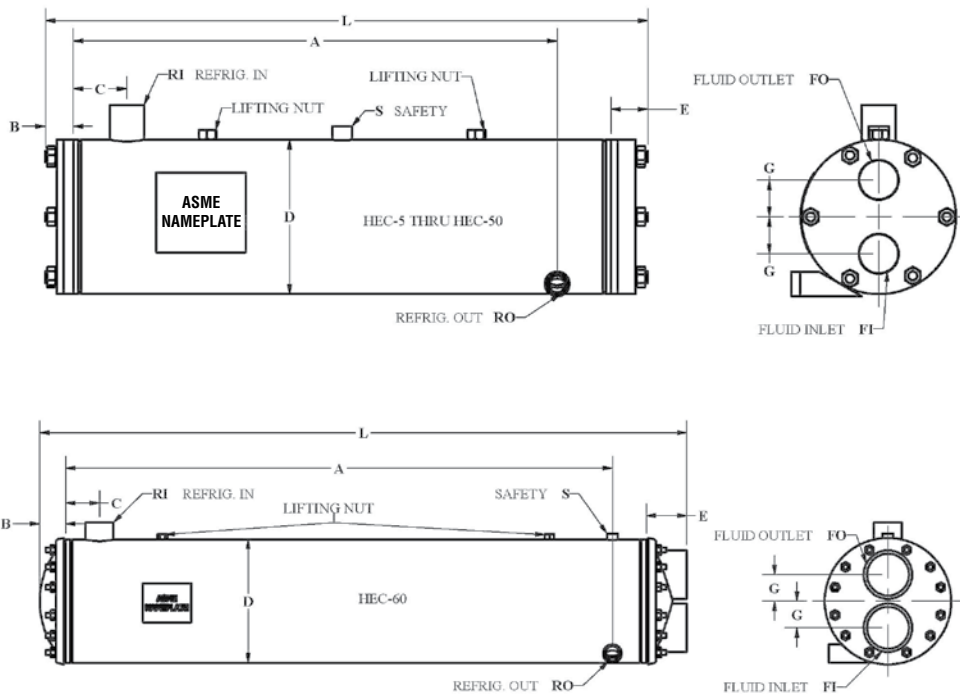

HEC Condensers

This new line of HEC condensers are high capacity & cleanable.

The enhanced copper tubing provides extra heat transfer surface thereby reducing the overall size of the condenser. Both the tube sheet and water plates have been epoxy coated for increased corrosion protection.

Custom models are also available. Maximum working pressure is 400 psig refrigerant side / 150 psig fluid side.

Consult Westermeyer Industries for more information.



ASME SECTION VIII


Model	Nominal HP		Dimensions (in)							Connections (in)			
	Clean	Fouled	A	B	C	D	E	G	L	Ri (ods)	RO (ods)	FO & FI (npt)	S (npt)
HEC-5	8.28	5.06	21-1/2	1-1/2	2-1/2	6-5/8	2	2	28	1-1/8	5/8	1-1/4	1/2
HEC-7	8.40	7.42	27-1/2	1-1/2	2-1/2	6-5/8	2	2	33-1/2	1/3/8	7/8	1-1/4	1/2
HEC-10	11.30	9.70	27-1/2	1-1/2	2-1/2	6-5/8	2	2	33-1/2	1/3/8	7/8	1-1/4	1/2
HEC-15	17.55	14.78	27	1-1/2	3	8-5/8	2	2	33-1/2	1-5/8	1-1/8	2	1/2
HEC-20	32.87	19.98	45	1-1/2	3	8-5/8	2	2	51-1/2	1-5/8	1-1/8	2	1/2
HEC-25	34.21	23.04	45	1-1/2	3	8-5/8	2	2	51-1/2	2-1/8	1-3/8	2	1/2
HEC-30	41.50	29.20	45	2	3	10-3/4	3	2-1/8	53	2-1/8	1-3/8	2-1/2	1/2
HEC-40	48.20	39.91	57	2	3	10-3/4	3	2-1/8	65	2-1/8	1-3/8	3	1/2
HEC-50	63.47	52.55	57	2	3	10-3/4	3	2-1/8	65	2-5/8	1-5/8	3	1/2
HEC-60	82.02	59.84	56-1/2	2-5/8	3-1/2	12-3/4	3-1/2	2-3/4	66-3/4	2-5/8	1-5/8	4	1/2

Note: Ratings pertain to R-22 only.

NEW PRODUCT!

HECH Condensers

Maximum Working Pressure—600 psig

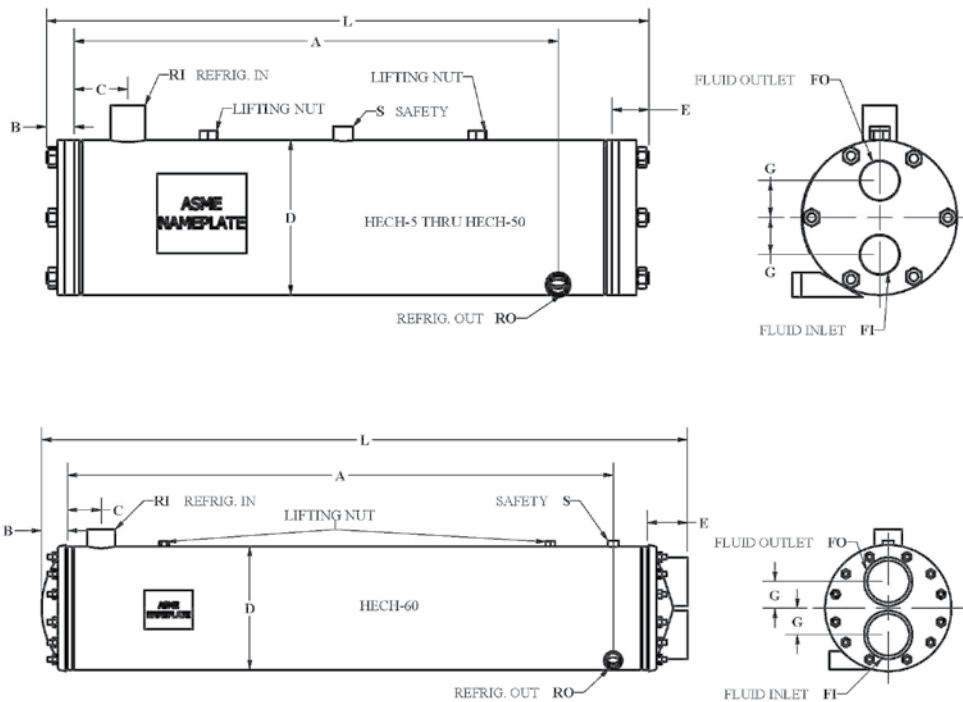

HECH Condensers

This new line of HECH condensers are high capacity & cleanable. The enhanced copper tubing provides extra heat transfer surface thereby reducing the overall size of the condenser. Both the tube sheet and water plates have been epoxy coated for increased corrosion protection.

Custom models are also available. Maximum working pressure is 600 psig refrigerant side / 150 psig fluid side.

Consult Westermeyer Industries for more information.



ASME SECTION VIII

Model	Nominal HP		Dimensions (in)							Connections (in)			
	Clean	Fouled	A	B	C	D	E	G	L	RI (ods)	RO (ods)	FO & FI (npt)	S (npt)
HECH-5	8.61	5.26	21-1/2	1-1/2	2-1/2	6-5/8	2	2	28	1-1/8	5/8	1-1/4	1/2
HECH-7	8.74	7.72	27-1/2	1-1/2	2-1/2	6-5/8	2	2	33-1/2	1/3/8	7/8	1-1/4	1/2
HECH-10	11.75	10.09	27-1/2	1-1/2	2-1/2	6-5/8	2	2	33-1/2	1/3/8	7/8	1-1/4	1/2
HECH-15	18.25	15.37	27	1-1/2	3	8-5/8	2	2	33-1/2	1-5/8	1-1/8	2	1/2
HECH-20	34.18	20.78	45	1-1/2	3	8-5/8	2	2	51-1/2	1-5/8	1-1/8	2	1/2
HECH-25	35.58	23.96	45	1-1/2	3	8-5/8	2	2	51-1/2	2-1/8	1-3/8	2	1/2
HECH-30	43.16	30.37	45	2	3	10-3/4	3	2-1/8	53	2-1/8	1-3/8	2-1/2	1/2
HECH-40	50.13	41.51	57	2	3	10-3/4	3	2-1/8	65	2-1/8	1-3/8	3	1/2
HECH-50	66.01	54.65	57	2	3	10-3/4	3	2-1/8	65	2-5/8	1-5/8	3	1/2
HECH-60	85.30	62.23	56-1/2	2-5/8	3-1/2	12-3/4	3-1/2	2-3/4	66-3/4	2-5/8	1-5/8	4	1/2

Note: Ratings pertain to R-410A only.